



## DOLL'S CHAIR


This chair may be any size, including up to adult size if your lathe can handle it. Shapes and proportions may need to be modified to suit the systems available for mounting and remounting the wood.

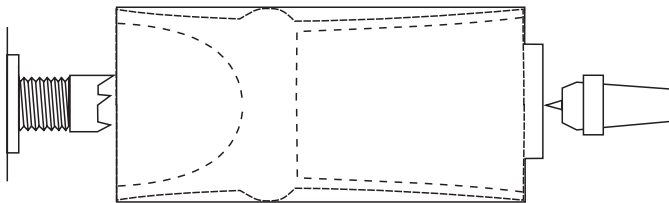


Start with the wood between centres and turn a spigot on the end that is to be the top of the chair. Turn the block round. You may shape it at this stage.

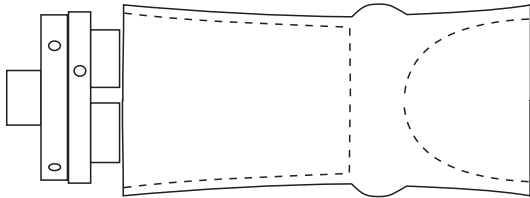

Mount the block in a chuck. Complete the outside shape. Sand and finish this area. Hollow the bottom of the chair. Consider at this stage how you will hold the wood by this bottom end while making the top end. Complete the bottom.

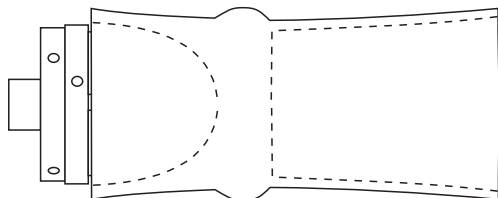

Here the wood is shown re-mounted on expanding jaws. Larger jaws or a jam chuck may be used to grip the outside. Now hollow the upper part. Try to get the sides to a fairly even thickness. Sand and finish this part.

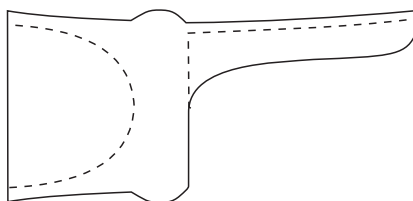

Saw away the unwanted wood around the top to make the desired chair back shape. Sand and finish this area.

